


RBU – Resist to Build Up

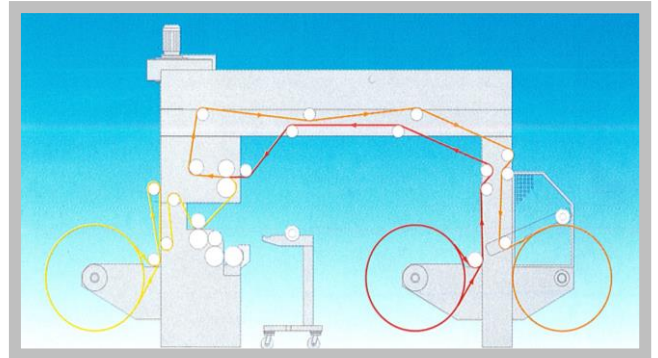

APPLICATIONS

- 🌐 For roll coatings used for adhesive laminating or lamination lines
- 🌐 Suitable for roller coatings in gravure printing units
- 🌐 Foil and printing industry

FEATURES AND BENEFITS

- 🌐 Peak temperature load capacity of up to 125° C
- 🌐 Low surface adhesion due to the special material composition
- 🌐 Reduced adhesion of adhesive residues, ink, paper dust etc. due to lotus effect
- 🌐 Designed for high machine speeds
- 🌐 Excellent sandability
- 🌐 Very good dimensional stability
- 🌐 Available in hardness between 50 - 98° Shore A
- 🌐 Available in various surface finishes and in antistatic version

NOTES

For other hardnesses or finishes, please contact our sales staff or our technical service.

This information and our technical advice – whether verbal, in writing or by way of trials – is given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to check its validity and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control, and therefore, entirely your own responsibility. Our products are sold in accordance with our General Conditions of Sales and Delivery.